

# Car DVD Loader DSV-811



## \* Mechanism

Slim Dimensional DVD mechanism (W x H x D : 141.1 x 24.3 x 130.5)  
Disc loading motorized.  
Optical Pick-up drive for DVD and CD compatibility  
Roller loading and eject system

## \* Protections

2nd disc insertion protect.  
8cm disc protection

## \* Integrated PWB

Using the one chip solution (CD/DVD frontend and backend solution with host processor)

	DVD-Video, VCD, SVCD	1902Kbytes
	CD-DA, DTS-CD, HDCD, CDG	4364Kbytes
Shock memory	Data (MP3, WMA, JPEG)	1706Kbytes
	Data (MPEG)	1706Kbytes
Temperature detection.	70°C	

## \* Interface

8V / 5V / 3.3V power supply  
CVBS Video output  
Y/C(S-Video) output  
RGB Video output  
UART(RXD, TXD and REQUEST) control interface  
SPDIF digital audio output  
I<sup>2</sup>S bus digital audio output  
I<sup>2</sup>S bus digital audio input (tbd)  
CVBS Video input (tbd)  
Down mixed analog output Lt/Rt (output level : 1.5Vrms)

## \* MultiRead

	DVD Video (Single/Double layer)
	DVD Recordable, VIDEO CD
Capability to read	CD Digital Audio, CD Recordable
	CD ReWritable, MP3 Playback
	HDCD, Hybrid SACD, SVCD

## SPECIFICATIONS

### Measuring conditions

according IEC68-1 part 5.3 standard conditions at Car DVD Loader unless otherwise stated

temperature	15°C to 35°C
rel.humidity	45% to 75%
air pressure	860 mbar to 1060 mbar
rate voltage	8.0V power / 5.0V power / 3.3V power
test disc	DTDVD / DTCD (DVS Korea : clean and undamaged)

### Environmental Conditions

This Loader should be used under the conditions listed below.

#### Temperature and Humidity

Operating Temperature	-20°C to 70°C
Storage Temperature	-40°C to 85°C
Operating Humidity	0% to 80%
Storage Humidity	0% to 90%
Condensation	No condensation of the conditions above

#### Vibration

Operating	No unrecoverable error 10-200Hz sine sweep rate in 1 octave/min 0.8G in Z directions 30 min/each direction
Non-Operating	No damage, No unrecoverable error 10-200Hz sine sweep rate in 1 octave/min 3G in X, Y and Z directions 30 min/axis

#### Shock

Non-Operating	No damage, No unrecoverable error 10 msec half-sine wave 50G(490m/s <sup>2</sup> ) 1 time in each direction
---------------	---

### Operating angle


The DSV-811 can operate at horizontal only

### Weight

DSV-811(Car DVD Loader) only : typ. 350g

### Mechanical dimensions

W x H x D : 141.1 x 24.3 x 130.5

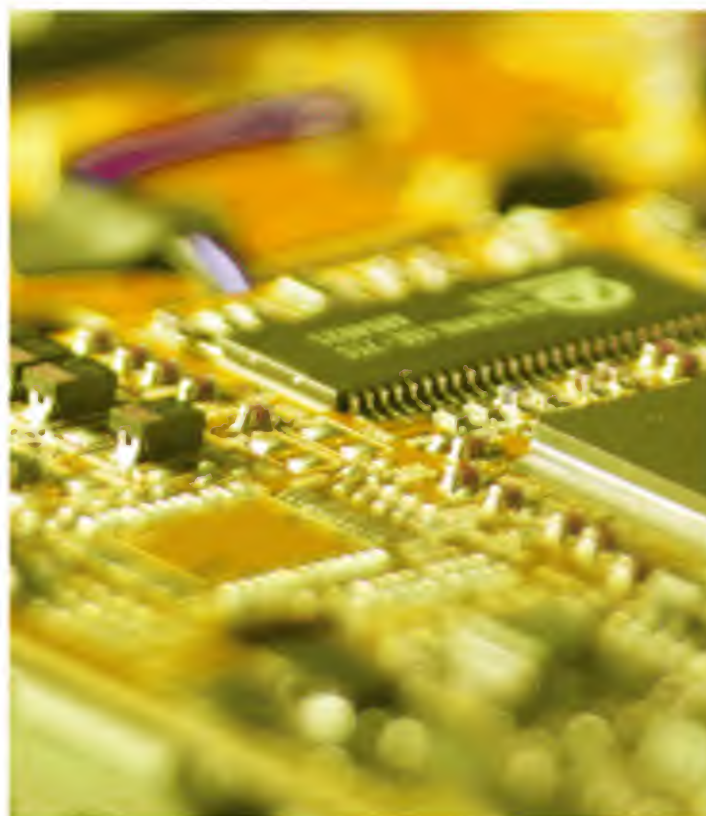

DVS Korea Co., Ltd.  
5th, 7th & 8th Floor, KPS Bldg. 196 Kumgok-dong Boondang-ku, Sungnam City Kyungki-do 463-726, Korea.  
Tel : 82-31-710-3800 / Fax 82-31-714-8312 <http://www.dvs.co.kr> / [sales@dvs.co.kr](mailto:sales@dvs.co.kr)

#### DVS America

1180 Aster Ave. Unit#F Sunnyvale, CA 94086 USA  
Tel : 408-260-3301 / Fax : 408-260-3305 <http://www.dvsystems.com> / [shaunk@dvsystems.com](mailto:shaunk@dvsystems.com)